



City of Rockwall
The New Horizon

**ADDENDUM #1
TO THE SPECIFICATIONS FOR
PARK LIGHT POLE REPLACEMENT BID**

The addendum is an integral part of the RFB and must be signed and returned with the submittal or acknowledged in the bid submittal.

The purpose of this addendum is to incorporate the following changes and or clarifications to the RFB:

1. Light pole height is 12 feet for all locations. See attached specifications.
2. Light pole bases – the City does not have drawings on the existing bases, so contractor shall decide whether to include the cost of new bases in total bid price. If contractor decides that new bases are required, please make a note of this add on to your bid form.
3. Globe choice – vertical ribbed.
4. The Phillips GX4 new style of fixture is acceptable for this project.

All other terms and conditions remain unchanged. If you have any questions regarding this addendum, please contact me at lewing@rockwall.com or 972-772-6418.


Respectfully,

Lea Ann Ewing
Purchasing Agent

Ordering Guide:


C11540: LUMINAIRE, 64 LED (shown)
C11540A: LUMINAIRE, 32 LED
C11540A: BANNER ARM
C11540A: POLE, 10'
C11540A: POLE, 12'-6"

Type S1

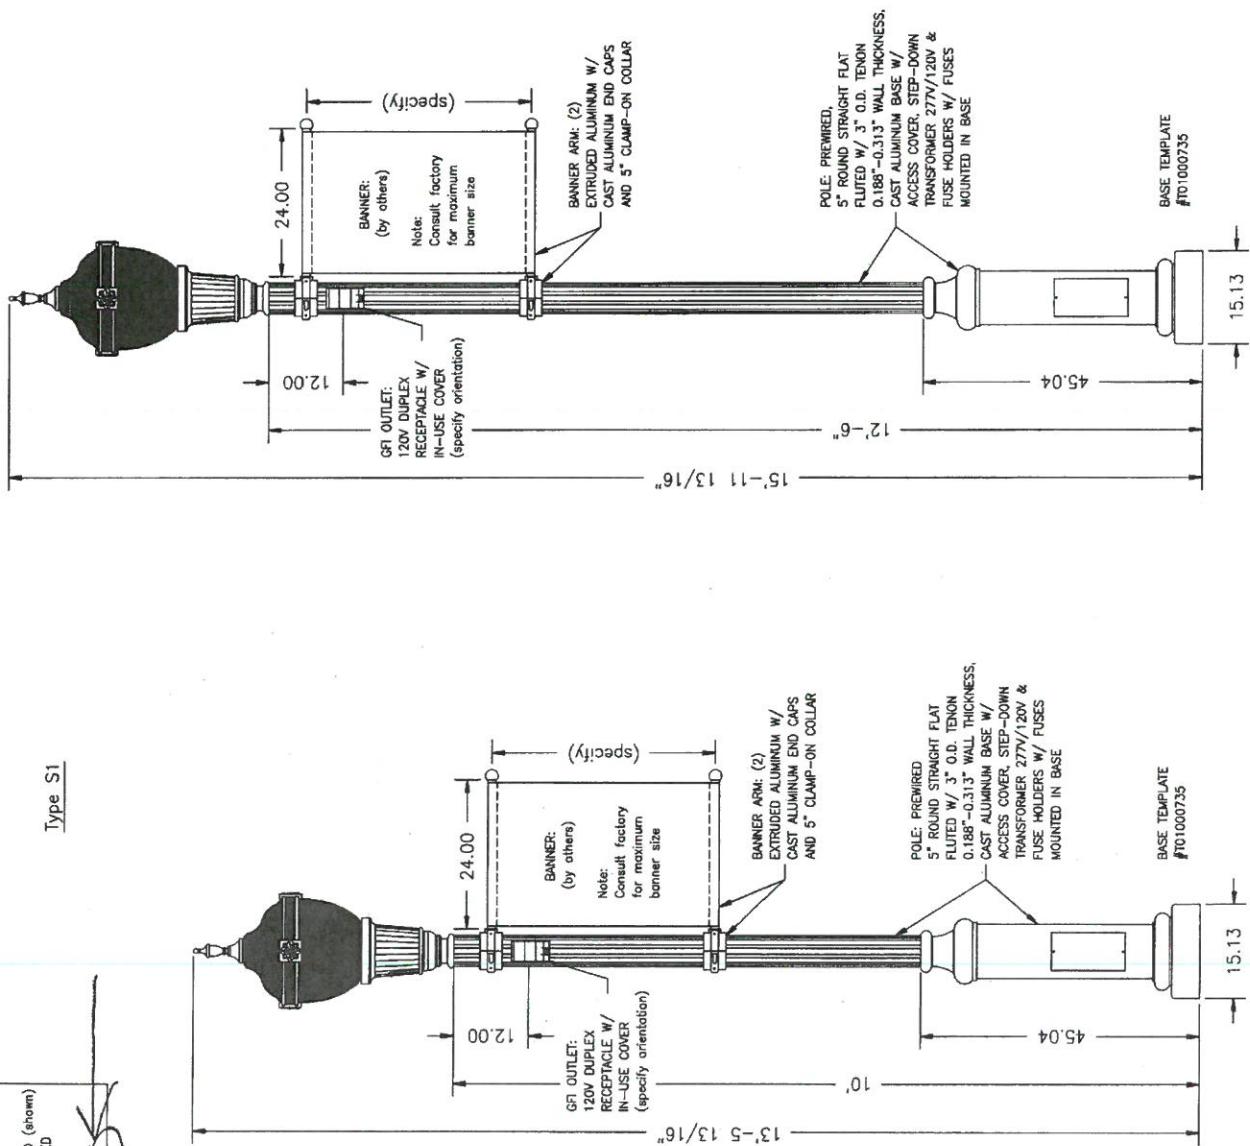

Color:
Black

Luminaire Detail
Scale 1:16

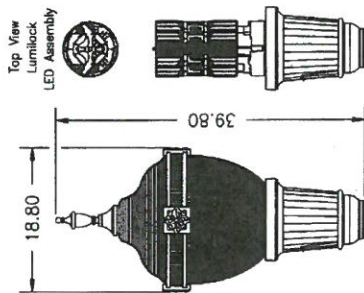

GLOBE:
X WIDE BODY, ACRYLIC

FASTENERS:
X HEX HEAD BOLTS
X ALLEN HEAD SCREWS

COLOR:
X BLACK
X WHITE
X VERDE
X BRONZE
X GREEN

COLOR TEMPERATURE:
X 3000K (warm)
X 4000K (neutral)
X 5000K (cool)

PHOTO CONTROL:
X 120V BUTTON-EYE
X 24V PHOTO-EYE
X 24V PHOTO-EYE
X TWIST-LOCK RECEPTACLE
X NONE

Lumilock LED Specifications:

- 32 or 64, Philips Lumileds Luxeon K LEDs, specify color temperature, minimum 70 Color Rendering Index (CRI), >80,000 hours of operational life (at 25°C ambient temperature & 70% lumen maintenance), aluminum core pcb, sealed glass lens, IP66 rated, type III light distribution.
- Integral Philips Advance Titanium LED driver, class 1, IP66 rated, 350mA (64 LED), 0-10V dimming or 500mA (32 LED), Inaltral 120-277 VAC, 50-60 Hz, RoHS compliant, field replaceable 10kV/10kA surge suppression.
- Manufactured to ISO 9001:2008 Standards.

PRODUCT APPROVALS	
HADCO	JLN
CUST.	
CONFIDENTIAL: This drawing is confidential and proprietary to Philips Hadco and may not be reproduced without the express written consent of Philips Hadco. Any use hereof or of any of the information or detail herein shall be for the sole benefit of Philips Hadco.	
NOTE: THIS DRAWING IS FOR REFERENCE ONLY. CHECK FOR LATEST REVISION PRIOR TO ORDERING	
Full Specification Drawing (Complete Assembly)	
PHILIPS HADCO 100 Crafkey Drive Littleton, PA 17340 Phone 717-359-7131 Fax 717-359-9515 www.hadco.com	
ASB NAME: City of Rockwell	
REP. TERRITORY:	09 CMG
SCALE:	DATE: 04/16/13
DRAWING NUMBER:	C11540-DWG01
REP. ALA	
REV. D	POR 14-029
BR. SMK	DATE: 06/11/14